

SECTION 00806

CHANGE ORDER

No. 01

DATE OF ISSUANCE 10/10/2025

EFFECTIVE DATE _____

OWNER St. Charles Parish

CONTRACTOR Sealevel Construction, Inc.

Contract: Montz Pump Station No. 1

Project: Montz Pump Station No. 1

OWNER's Contract No. P210301

ENGINEER's Contract No. 39145-1312

ENGINEER GIS Engineering, LLC

You are directed to make the following changes in the Contract Documents:

Description:

1. Add the Following Work Items:

- a. New Contract Item # CO1-001: *Capping and removal of unforeseen abandoned gas line*
Addition of \$ 23,385.78 (L.S.). See attached change order request for details.

Total of Added Work Items = + \$23,385.78

2. Revise the Following Work Item Quantities:

- a. Contract Item # 02065-01: *Concrete Piles – 18" Square*
The quantity is to be changed to 3,520 linear feet. (+ \$ 70,400.00)
- b. Contract Item # 02066-01: *Test Pile*
The quantity is to remain as 1 lump sum but increase in cost. (+ \$ 4,056.98)
- c. Contract Item # 16000-01: *Electrical Power Supply, Gear & Lighting*
The quantity is to remain as 1 lump sum but increase in cost. (+ \$ 13,859.31)

Total of Change in Work Items Quantity = (+ \$ 88,316.29)

Reason for Change Order:

1. Add Work Items

- a. An unforeseen 4" gas line was encountered on site which was not shown on any available permit drawings, surveys, right-of-way plats, etc. The unforeseen 4" gas line was hot tapped to verify whether the gas line was active or not. The gas line was inactive, and therefore the gas line was cut, capped, and removed from within the project limits. This addition to the contract was necessary in order to continue construction of the pump station per the plans.

2. Revise Work Item Quantities

- a. Increase the quantity of Bid Item No. 02065-01 (Concrete Piles - 18" Square) - by 320 linear feet to account for the four (4) batter piles unaccounted for in the bid form. The unit price of Bid Item No. 02065-01 is \$220.00 per Linear Foot, therefore, the contract results in an increase in the amount of \$70,400.00.
- b. Increase in the lump sum amount for Bid Item No. 16000-01 (Electrical Power Supply, Gear & Lighting) by \$13,859.31 to account for the required breakers from M-frame to L-frame breakers arising from the electrical coordination study between all electrical components.
- c. Increase in the lump sum amount for Bid Item No. 02066-01 (Test Pile) by \$4,056.98 to account for the increased reaction piles length for a total static load test to 329 kips.

Attachments: Sealevel Change Order Request #1 and # 3
Executed Work Change Directive No. 1

CHANGE IN CONTRACT PRICE:
Original Contract Price \$ <u>13,479,955.00</u>
Net Increase (Decrease) from previous Change Orders No. <u>N/A</u> to <u>01</u> : \$ <u>111,702.07</u>
Contract Price prior to this Change Order: \$ <u>13,479,955.00</u>
Net increase (decrease) of this Change Order: \$ <u>111,702.07</u>
Contract Price with all approved Change Orders: \$ <u>13,591,657.07</u>

CHANGE IN CONTRACT TIMES:
Original Contract Times: Substantial Completion: _____ Ready for final payment: _____ (days or dates)
Net change from previous Change Orders No. ____ to No. ____: Substantial Completion: _____ Ready for final payment: _____ (days)
Contract Times prior to this Change Order: Substantial Completion: _____ Ready for final payment: _____ (days or dates)
Net increase (decrease) this Change Order: Substantial Completion: _____ Ready for final payment: _____ (days)
Contract Times with all approved Change Orders: Substantial Completion: _____ Ready for final payment: _____ (days or dates)

RECOMMENDED:

By: [Signature]
ENGINEER (Authorized Signature)

Date: 10/14/2025

APPROVED:

By: _____
OWNER (Authorized Signature)

Date: _____

ACCEPTED:

By: [Signature]
CONTRACTOR (Authorized Signature)

Date: 10/15/25

SECTION 00805

WORK CHANGE DIRECTIVE

No. 1

DATE OF ISSUANCE June 11, 2025 EFFECTIVE DATE June 18, 2025
Owner: St. Charles Parish
Contractor: Sealevel Construction, Inc.
Contract: Ordinance No. 25-4-13; Montz Pump Station No. 1; Date 4/23/2025
Project: Montz Pump Station No. 1
Owner's Contract No.: P210301 Engineer's Contract No.: 39145-1312
ENGINEER: GIS Engineering, LLC

Contractor is directed to proceed promptly with the following change(s):
Description:

1. Increase in the lump sum amount for Bid Item No. 02066-01 (Test Pile) by \$4,056.98 to account for the increased reaction piles length for a total static load test to 329 kips.
2. Increase the quantity of Bid Item No. 02065-01 (Concrete Piles - 18" Square) - by 320 linear feet to account for the four (4) batter piles unaccounted for in the bid form. The unit price of Bid Item No. 02065-01 is \$220.00 per Linear Foot, therefore, the contract results in an increase in the amount of \$70,400.00

Attachments: (List documents supporting change):

1. Change Order Request #1 – Test Pile Frame Reaction Piles

Purpose for Work Change Directive:

Directive to proceed promptly with the Work described herein, prior to agreeing to changes on Contract Price and Contract Time, is issued due to: *(check one)*


- ☐ Non-agreement on pricing of proposed change.
☒ Necessity to proceed for schedule or other project reasons.

Estimated Change in Contract Price and Contract Times (non-binding, preliminary):

Contract Price: \$ 74,456.98 [increase] [decrease]
Contract Time: 0 days [increase] [decrease]

Basis of estimated change in Contract Price:


- ☒ Lump Sum ☒ Unit Price
☐ Cost of the Work ☐ Other

Recommended:  Limited Authorization By*:  Received: 
By: Agustin Rega, PE By: Sam Scholle By: _____
Engineer (Authorized Signature) Owner's Representative* Contractor (Authorized Signature)
Title: Project Manager Title: Force Projects Manager Title: PRESIDENT
Date: 07/07/2025 Date: 7/11/2025 Date: 7/14/25

*Owner's Representative is not authorized to finalize a Change Order nor does the Work Change Directive substitute the Change Order process as more fully set out in the General Conditions of the Construction Contract.

Approved by Funding Agency (if applicable)

By: _____ Date: _____
Title: _____



SEALEVEL
CONSTRUCTION

1069 HWY 3185

Thibodaux, LA 70301

T: 985-448-0970

E: estimating@sealevelinc.com

www.sealevelinc.com

May 29, 2025

Agustin J. Rega, P.E.
GIS Engineering


RE: Montz Pump Station No. 1
COR # 001 – Test Pile Frame Reaction Piles

Dear Mr. Rega:

Sealevel Construction is pleased to offer, for your consideration, a lump sum price of **\$4,056.98** to provide longer reaction piles for the test pile. This COR is to lengthen each reaction pile by 10' for the request to load the test pile to 329 kips.

Regards,
Sealevel Construction, Inc.

James Ryan Blakely
Project Manager



SEALEVEL
CONSTRUCTION

1069 HWY 3185
Thibodaux, La 70301
T: 985-448-0970
E: estimating@sealevelinc.com
www.sealevelinc.com

Cost Detail

Project Name: Montz Pump Station #1
Job Number:
Bid As:
Estimator:
Project Address:
Completion Date:

Customer: ST CHARLES PARISH
Billing Address: Destrehan, LA
Phone:
Contact:

Pay Items

Description	Quantity	UM	Unit	Total
			Direct Cost	Direct Cost
D CO # 1 - Test Pile Frame Reaction Piles	1.00	LS	\$3,316.15	\$3,316.15
 HP14x89 Reaction Piles	3,560.00	LB	\$0.75	\$2,670.00
 Freight	1.00	LS	\$646.15	\$646.15

Direct Cost Totals

	Amount	Percent of Direct Cost
Labor:	\$0.00	0.00%
Equipment Owned:	\$0.00	0.00%
Equipment Rented:	\$0.00	0.00%
Materials Owned:	\$0.00	0.00%
Materials Purchased:	\$3,316.15	100.00%
Subcontracted:	\$0.00	0.00%
Trucking Owned:	\$0.00	0.00%
Trucking Hired:	\$0.00	0.00%
Miscellaneous:	\$0.00	0.00%
Plug:	\$0.00	0.00%
Direct Cost:	\$3,316.15	

Pay Item Summary

	Amount	Percent of Bid Price
Total Direct Cost:	\$3,316.15	81.74%
Total DC Adds/Cuts:	\$0.00	0.00%
Total Indirect Cost:	\$99.48	2.45%
Total Bond:	\$32.86	0.81%
Total Overall Cost:	\$3,448.50	85.00%
Total Overhead:	\$202.95	5.00%
Total Profit:	\$405.54	10.00%
Total Margin:	\$608.48	15.00%
Total Bid Price:	\$4,056.98	



QUOTATION: 295.05 REV0 PR4

Quote date: 5/19/2025

Project Name:

City / State: Thibodaux Louisiana (LA)

Customer: Sealevel

Project Status: unknown

Customer Address:

Payment Terms: Net 30 - Subject to credit approval

Attn. Aaron Lee

Estim. Delivery time: From inventory **2-3 days**

Office/Cell Phone:

Delivery Terms: DDP Jobsite (by truck)

E-mail Address:

Quote Validity: 7 Days - Subject to prior sale

	Product Description	Quantity	Unit Length	Total Length / Wall Length	Unit Weight	Total weight	Unit Price	Total Price
1	Hp 14 x 89	4 pcs	65.0 ft	260.0 LF	89.00 lbs	23,140 lbs	\$0.75 per lb	\$17,355.00
2	Trucking cost	1 trucks					\$3,150.00 per load	\$3,150.00
3							Total price:	\$20,505.00

Material origin Any

Material standard New material subject to the industry standard unless noted otherwise.

Material specification ASTM A572 GR50

Terms & conditions Any other terms or trimming and liquidation charges are per our general sales & rental terms and conditions listed on our website.

Buyer to verify suitability, lengths, and quantities

Freight Freight charges and truck availability are subject to change between time of quotation and time of actual shipment

Other items Upon request we also supply: corners, fabrication, galvanizing, engineering support

Sales contact(s) **Ronnie Hoefeld - 504-338-3143**
Paul Jaquillard - 504-417-8064
Call us at any time if you have questions or if you are looking for alternate options.



SEALEVEL
CONSTRUCTION

1069 HWY 3185
Thibodaux, LA 70301
T: 985-448-0970
E: estimating@sealevelinc.com
www.sealevelinc.com

September 4, 2025

Agustin J. Rega, P.E.
GIS Engineering

RE: Montz Pump Station No. 1
COR # 003 – Test Pile Downtime

Dear Mr. Rega:


Sealevel Construction is pleased to submit, for your consideration, a lump sum proposal in the amount of **\$23,385.78** for the removal of the unforeseen underground gas line. This proposal includes all labor, materials, and equipment necessary to complete the following scope of work:

- Hot tap of the existing 4" carbon steel gas line
- Excavation, exposure, and demolition of approximately 198 linear feet of the gas line
- Installation of two (2) end caps on each section of the gas line
- Exploration work at Montz Pump Station #2
- Compensation for downtime of pile driving crew and equipment during hot tap and gas line removal

Please let me know if you have any questions or require any additional information.

Regards,
Sealevel Construction, Inc.

James Ryan Blakely
Project Manager



SEALEVEL

CONSTRUCTION

1069 HWY 3185
Thibodaux, La 70301
T: 985-448-0970
E: estimating@sealevelinc.com
www.sealevelinc.com

Cost Detail

Project Name:	Montz Pump Station #1	Customer:	ST CHARLES PARISH
Job Number:		Billing Address:	Destrehan, LA
Bid As:		Phone:	
Estimator:		Contact:	
Project Address:			
Completion Date:			

Pay Items

Description	Quantity	UM	Unit Direct Cost	Total Direct Cost
D CO # 3 - Existing Underground Gas Line	1.00	LS	\$19,113.72	\$19,113.72
D Site Management	1.00	LS	\$758.55	\$758.55
Project Manager [0.25]	11.00	HR	\$84.11	\$231.30
Superintendent [0.25]	11.00	HR	\$79.53	\$218.70
Insurance Extra And Bond [0.0123420293]	1.00	LS	\$25,000.00	\$308.55
D Tap, Pothole, And Remove Existing Gas Line	1.00	LS	\$14,548.58	\$14,548.58
Foreman Land W/ PU & Cell	11.00	HR	\$78.82	\$867.03
Operator 1 Land	11.00	HR	\$51.42	\$565.67
Laborer Land [2]	11.00	HR	\$40.32	\$887.13
E Bobcat E50 Excavator	1.00	DY	\$167.50	\$167.50
E LB 245 Excavator	1.00	DY	\$565.00	\$565.00
M Big Tool	1.00	DY	\$126.25	\$126.25
M Small Supply	1.00	UNIT	\$100.00	\$100.00
S Tapping Sub - Level A	1.00	LS	\$11,270.00	\$11,270.00
D Pile Crew Downtime	1.00	LS	\$2,930.94	\$2,930.94
Foreman Land	5.50	HR	\$78.82	\$433.52
Crane Operator Land	5.50	HR	\$59.75	\$328.62
Pile Driver Land	5.50	HR	\$45.87	\$252.31
Welder Land	5.50	HR	\$51.42	\$282.83
Laborer Land	5.50	HR	\$40.32	\$221.78
C 300T Crawler Crane	0.50	DY	\$1,525.00	\$762.50
CO 1300 CFM Air Compressor	0.50	DY	\$320.00	\$160.00
E LB 350 Excavator	0.50	DY	\$445.00	\$222.50
L Bobcat T-870 Loader	0.50	DY	\$233.75	\$116.88
S Welding Machine	0.50	DY	\$80.00	\$40.00
T Pickup [2]	0.50	DY	\$110.00	\$110.00
D Weld Cap To Existing Pipe	1.00	LS	\$596.25	\$596.25
Foreman Land W/ PU & Cell	2.75	HR	\$78.82	\$216.76
Welder Land	2.75	HR	\$51.42	\$141.42
Laborer Land	2.75	HR	\$40.32	\$110.89


Description		Quantity	UM	Unit Direct Cost	Total Direct Cost
<i>(Item CO # 3 - Existing Underground Gas Line continued)</i>					
 S Welding Machine		0.25	DY	\$108.75	\$27.19
 M Small Supply		1.00	UNIT	\$100.00	\$100.00
 Cut Pipe Caps		2.00	EACH	\$139.70	\$279.40
 MESSER CUTTING (20.00 LS/DY, 0.10 DY)		2.00	LS	\$89.70	\$179.40
 Messer Operator		1.10	HR	\$47.26	\$51.99
 Laborer Land		1.10	HR	\$43.10	\$47.41
 Messer Table		0.10	DY	\$800.00	\$80.00
 Small Supply Land		1.00	EACH	\$100.00	\$100.00

Direct Cost Totals

	Amount	Percent of Direct Cost
Labor:	\$4,857.36	25.41%
Equipment Owned:	\$2,377.81	12.44%
Equipment Rented:	\$0.00	0.00%
Materials Owned:	\$0.00	0.00%
Materials Purchased:	\$300.00	1.57%
Subcontracted:	\$11,270.00	58.96%
Trucking Owned:	\$0.00	0.00%
Trucking Hired:	\$0.00	0.00%
Miscellaneous:	\$308.55	1.61%
Plug:	\$0.00	0.00%
Direct Cost:	\$19,113.72	

Pay Item Summary

	Amount	Percent of Bid Price
Total Direct Cost:	\$19,113.72	81.73%
Total DC Adds/Cuts:	\$0.00	0.00%
Total Indirect Cost:	\$573.41	2.45%
Total Bond:	\$189.42	0.81%
Total Overall Cost:	\$19,876.56	84.99%
Total Overhead:	\$1,170.42	5.00%
Total Profit:	\$2,338.79	10.00%
Total Margin:	\$3,509.22	15.01%
Total Bid Price:	\$23,385.78	



SEALEVEL
CONSTRUCTION

1069 HWY 3185
Thibodaux, LA 70301
T: 985-448-0970
E: estimating@sealevelinc.com
www.sealevelinc.com

October 9, 2025

Agustin J. Rega, P.E.
GIS Engineering

RE: Montz Pump Station No. 1
COR # 004 – Revise Pump Feeder Breakers


Dear Mr. Rega:

Sealevel Construction is pleased to submit, for your consideration, a lump sum proposal in the amount of **\$13,859.31** to revise the four (4) pump soft starter breakers from M-frame to L-frame breakers to add the adjustable time delay function necessary for proper coordination with the main generator breaker.

Please let me know if you have any questions or require any additional information.

Regards,
Sealevel Construction, Inc.

James Ryan Blakely
Project Manager



SEALEVEL
CONSTRUCTION

1069 HWY 3185
Thibodaux, La 70301
T: 985-448-0970
E: estimating@sealevelinc.com
www.sealevelinc.com

Cost Detail

Project Name: Montz Pump Station #1	Customer: ST CHARLES PARISH
Job Number:	Billing Address: Destrehan, LA
Bid As:	Phone:
Estimator:	Contact:
Project Address:	
Completion Date:	

Pay Items

Description	Quantity	UM	Unit Direct Cost	Total Direct Cost
 COR # 4 - Revise Pump Feeder Breakers	1.00	LS	\$11,328.25	\$11,328.25
 Site Management	1.00	LS	\$303.25	\$303.25
 Project Manager [0.25]	2.75	HR	\$84.11	\$57.82
 Superintendent [0.25]	5.50	HR	\$79.53	\$109.35
 Insurance Extra And Bond [0.0123420293]	1.00	LS	\$11,025.00	\$136.07
 Revise Pump Feeder Breakers	1.00	LS	\$11,025.00	\$11,025.00
 Rodrigue Electric	1.00	UNIT	\$11,025.00	\$11,025.00

Direct Cost Totals

	Amount	Percent of Direct Cost
Labor:	\$167.18	1.48%
Equipment Owned:	\$0.00	0.00%
Equipment Rented:	\$0.00	0.00%
Materials Owned:	\$0.00	0.00%
Materials Purchased:	\$0.00	0.00%
Subcontracted:	\$11,025.00	97.32%
Trucking Owned:	\$0.00	0.00%
Trucking Hired:	\$0.00	0.00%
Miscellaneous:	\$136.07	1.20%
Plug:	\$0.00	0.00%
Direct Cost:	\$11,328.25	

Pay Item Summary

	Amount	Percent of Bid Price
Total Direct Cost:	\$11,328.25	81.74%
Total DC Adds/Cuts:	\$0.00	0.00%
Total Indirect Cost:	\$339.85	2.45%
Total Bond:	\$112.26	0.81%
Total Overall Cost:	\$11,780.36	85.00%
Total Overhead:	\$693.12	5.00%
Total Profit:	\$1,385.83	10.00%
Total Margin:	\$2,078.95	15.00%
Total Bid Price:	\$13,859.31	



1453 Tiger Dr.
Thibodaux, La 70301
985-447-2164
adam@rodrigueselectric.com

Montz Pump Station #1 – CO #1 – Revise Pump Feeder Breakers

Date: 10/6/2025

Revision: 0

Change Order Description:

Revise the four (4) pump soft starter breakers from M-frame to L-frame breakers to add the adjustable time delay function necessary for proper coordination with the main generator breaker. The generator breaker is outside of SqD's scope and therefore coordination could not be confirmed prior to the bid.

The initial coordination study included M-frame breakers that meet the MCC specification (see below & attached), but the revised study requires additional functionality beyond what was specified to achieve proper coordination.

Reference Specifications:

Specification Section 16443 – Motor Control Centers (Part 2, 2.5, 3.c) refers to long- and short-time adjustments as a requirement only for the feeder tap units.

Specification Section 16443 – Motor Control Centers (Part 2, 2.4, C, 3) does not include and time adjustment requirements for MCCB Disconnecting Means for the Combination Controllers.

Adam Roth

Manager

adam@rodrigueselectric.com



1453 Tiger Drive
Thibodaux, LA 70301

985-447-2164

Bill To:
SEALEVEL CONSTRUCTION, INC.
P.O. BOX 1037
THIBODAUX, LA 70302
United States

Quote

Quote #: 11969-SQRES
Quote Date: 09/11/2025
Due Date: 10/11/2025

Job Description:
MONTZ PUMP STATION NO. 1
CO #1 - REVISE PUMP FEEDER BREAKERS

Customer PO #:

Terms: Net 30

	Item	Description	Quantity	Unit Price	Amount
1	*	COST TO REVISE PUMP FEEDER BREAKERS FROM M-FRAME TO L-FRAME FOR ADDED ADJUSTIBLE TIME DELAY FUNCTIONALITY (SEE VENDOR QUOTE ATTACHED)	1	\$11,025.00	\$11,025.00
Subtotal					\$11,025.00
Total					\$11,025.00

**A monthly finance charge of 1.5% (18%) will be assessed on all outstanding balances over 30 days. It is agreed that all collection costs, attorney fees, court costs, etc. involved in collection of those charges will be borne by the customer.

Adam Roth

From: David T Tanner <dtanner@nulite.com>
Sent: Tuesday, September 2, 2025 8:20 AM
To: Adam Roth; Erich Husson; David T Tanner
Subject: 23399 - MONTZ PUMP STATION NO. 1 STUDY

Adam – please see below from Dave M. @ SE, regarding the soft starters.

Let me know if this will work for you.

David Tanner
O: 504-733-3300
M: 504-330-2388



From: David Maronge <david.maronge@se.com>
Sent: Tuesday, September 2, 2025 7:52 AM
To: David T Tanner <dtanner@nulite.com>
Cc: Erich Husson <ehusson@nulite.com>; Howard Demedeiros <howard.demedeiros@se.com>
Subject: RE: 23399 - MONTZ PUMP STATION NO. 1 STUDY

EXTERNAL EMAIL

David,

Our MCC for this project was quoted with “soft starts” that included our “standard” UL rated thermal-magnetic M-frame MCCB. Due to coordination study factors that were out of Schneider Electric’s control, The study findings requested we change the “standard” UL rated M-frame soft start breaker to a “LJ” electronic trip “LI” breaker to meet the current coordination study needs. We contacted our plant to verify if the “LJ” breaker would still comply with the UL rating of the soft start, which they verified it would. This change of breaker request has resulted in our change order #4. Please let me know if you have any other questions or concerns.

Thanks,

David Maronge | **Square D by Schneider Electric** | Power North America | United States | Sales
Toll Free: 888-778-2733 | Cell: 504-858-9737 |
Email: david.maronge@se.com | Site: www.schneider-electric.com | Address: Slidell, LA 70461

*** Please consider the environment before printing this e-mail

Prepared By:

Howard Demedeiros
Customer Project Specialist
howard.demedeiros@se.com

Order Number: 0051276520

Proposal Name: Montz Pump Station

Change Quote Name: CO#4 (0051276520) L Frame Breaker MCC

Order Number: 0051276520

Proposal Number: P-210929-2590477

PO Number:

Change Quote Number: Q-6240940

Quote Date: 08/26/2025

Through Addenda Number: 0

Sales Representative: David Maronge

Conditions of Sale

This Quotation is subject to Coordinated Project Terms. See <https://www.se.com/us/en/download/document/0100PL0043/>

Quoted price in currencies other than U.S. Dollars is per the annual Schneider Electric exchange guidance.
Quote is valid for 30 days. Quoted lead times are approximate and subject to change.

Schneider Electric reserves the right to amend, withdraw or otherwise alter this submission without penalty or charge as a result of any event beyond its control arising from or due to the current Covid-19 epidemic or events subsequent to this epidemic / pandemic including changes in laws, regulations, by laws or direction from a competent authority.

Pricing

Total AUTHORIZED US Dollars

\$ 11,025

Seq #	Qty	Product Description
1	1	Designation : MCC Product Details : 1 - Model 6 LVMCC Comms-Model 6 MCC - Industrial Package ----- Engineered To Order (ETO) ----- POWER SYSTEM DATA: System Voltage: 480Y/277V 3PH 4W 60Hz System Source Type: 3 Phase Wye System Source Ground Point: Common Point Grounded Max Available Fault Current (RMS): 65kA Source Description: Single Main BUS SYSTEM DATA: Power Bus: 2000A Tin Plated Copper Vertical Bus: 300A Tin Plated Copper Bus Bracing: 65kA Neutral Bus: 50 Percent Rated Tin Plated Copper Horizontal Ground Bus: 300A Tin Plated Copper Vertical Ground Bus: Tin Plated Copper ENCLOSURE DATA: Enclosure Type: 20" Deep General Type 1 Gasketed Exterior Color: ANSI 49 STRUCTURE FEATURES: Seismic Rating: Seis Equipment Mounting Premium Barrier trough barrier section bar Comm Neut S IP (Modbus) Single Multi Page File Surface / Black Letters Plate Screws ACCESSORIES: Cost Est Report SPECIAL PRICING AND SECTION COUNT DATA: 7 - Total Section(s) in Lineup 6 - Section(s) with no Vertical Bus 1 - Section(s) with 300A Tin Plated Copper Vertical Bus DIMENSIONS AND WEIGHT ----- Dimensions: 210.00"W X 20"D X 94.5"H

Approximate Weight: 5460.00 lbs / 2476.66 kgs

INCOMING

Incoming Connection Type: Cable
Entry Direction: Through the Bottom

MAIN

Main Lugs Bottom Entry 2000A
Aluminum Mechanical Lugs: (7) 3/0 - 750 kcmil
Wires/Phase
Neutral Lug Termination
Device Height - 72 in
Power Meter PM5563 w/ Display, 4 Wire, 3 CTs
Wired Ethernet Communication
#14 AWG MTW Control Wire
Factory Assigned Plastic Sleeve Wire
Markers for Metering
Device Height - 6 in

FEEDERS

1 - Circuit Breaker Branch Feeder 110A
65kA Interrupting Rating
Aluminum Mechanical Lugs: (1) 14 - 2/0
AWG Wire/Phase
Circuit Breaker Shunt Trip 120Vac
Circuit Breaker Internal Interlocks 1
Device Height - 12 in
1 - Circuit Breaker Branch Feeder
65kA Interrupting Rating
Aluminum Mechanical Lugs: (1) 14 - 2/0
AWG Wire/Phase
Circuit Breaker Shunt Trip 120Vac
Circuit Breaker Internal Interlocks 1
Neutral Lug Termination
Device Height - 12 in
1 - Circuit Breaker Branch Feeder
65kA Interrupting Rating
Aluminum Mechanical Lugs: (1) 14 - 2/0
AWG Wire/Phase
Circuit Breaker Shunt Trip 120Vac
Circuit Breaker Internal Interlocks 1
Neutral Lug Termination
Device Height - 12 in

1 - Circuit Breaker Branch Feeder 110A
65kA Interrupting Rating
Aluminum Mechanical Lugs: (1) 14 - 2/0
AWG Wire/Phase
Circuit Breaker Shunt Trip 120Vac
Circuit Breaker Internal Interlocks 1
Neutral Lug Termination
Device Height - 12 in
1 - Circuit Breaker Branch Feeder
65kA Interrupting Rating
Aluminum Mechanical Lugs: (1) 14 - 2/0
AWG Wire/Phase
Circuit Breaker Shunt Trip 120Vac
Circuit Breaker Internal Interlocks 1
Neutral Lug Termination
Device Height - 12 in

FEEDER FEATURES

Factory Assigned Plastic Sleeve Wire Markers

SOFT START CONTROLLERS

4 - Altivar 480, 350 HP, Standard Duty with
Circuit Breaker, IEC Contactors and
SSRV Model C48

COMMON SOFT START CONTROLLER FEATURES

Circuit Breaker Shunt Trip 120Vac
Circuit Breaker Internal Interlocks 1A/1B
Emergency Full Voltage Starter
500VA Control Power Transformer
SPDT Operating Mechanism Interlock
Auxiliary Run Contacts
Bypass/Short Aux Contacts
Auxiliary Trip Contacts
#16 AWG MTW Control Wire
iMCC Network Connection - Ethernet (Modbus TCP)
30mm Type K Pilot Devices
Start/Stop Push Button
Hand-Off-Auto Selector Switch
Motor On LED Pilot Light: Red Push-to-Test
Motor Off LED Pilot Light: Green Push-to-Test
Power On LED Pilot Light: Blue
Trip LED Pilot Light: Yellow Push-to-Test
Analog Ammeter
Elapsed Time Meter
Factory Assigned Plastic Sleeve Wire Markers
Device Height - 72 in
(1) UPSIZED FOR SEVERE DUTY W/ FVB (TAG# TR-156314-1)
(1) SDSA3650 SURGE ARRESTER ADDED (TAG# TR-156314-1)
(1) Phase failure relay RM17TE00 (TAG# TR-156314-1)
(1) Power Logic P5M30 Mount in rack (TAG# TR-156314-1)
(1) C/O-change M-frame terminal block (TAG# TR-156314-1)

AUTOMATION DEVICES


Managed Ethernet
Device Health

MISCELLANEOUS

(TAG#:

Supply 6"

Amps X 10 3000 GEN (Nom. kV=0.48, Plot Ref. kV=0.48)

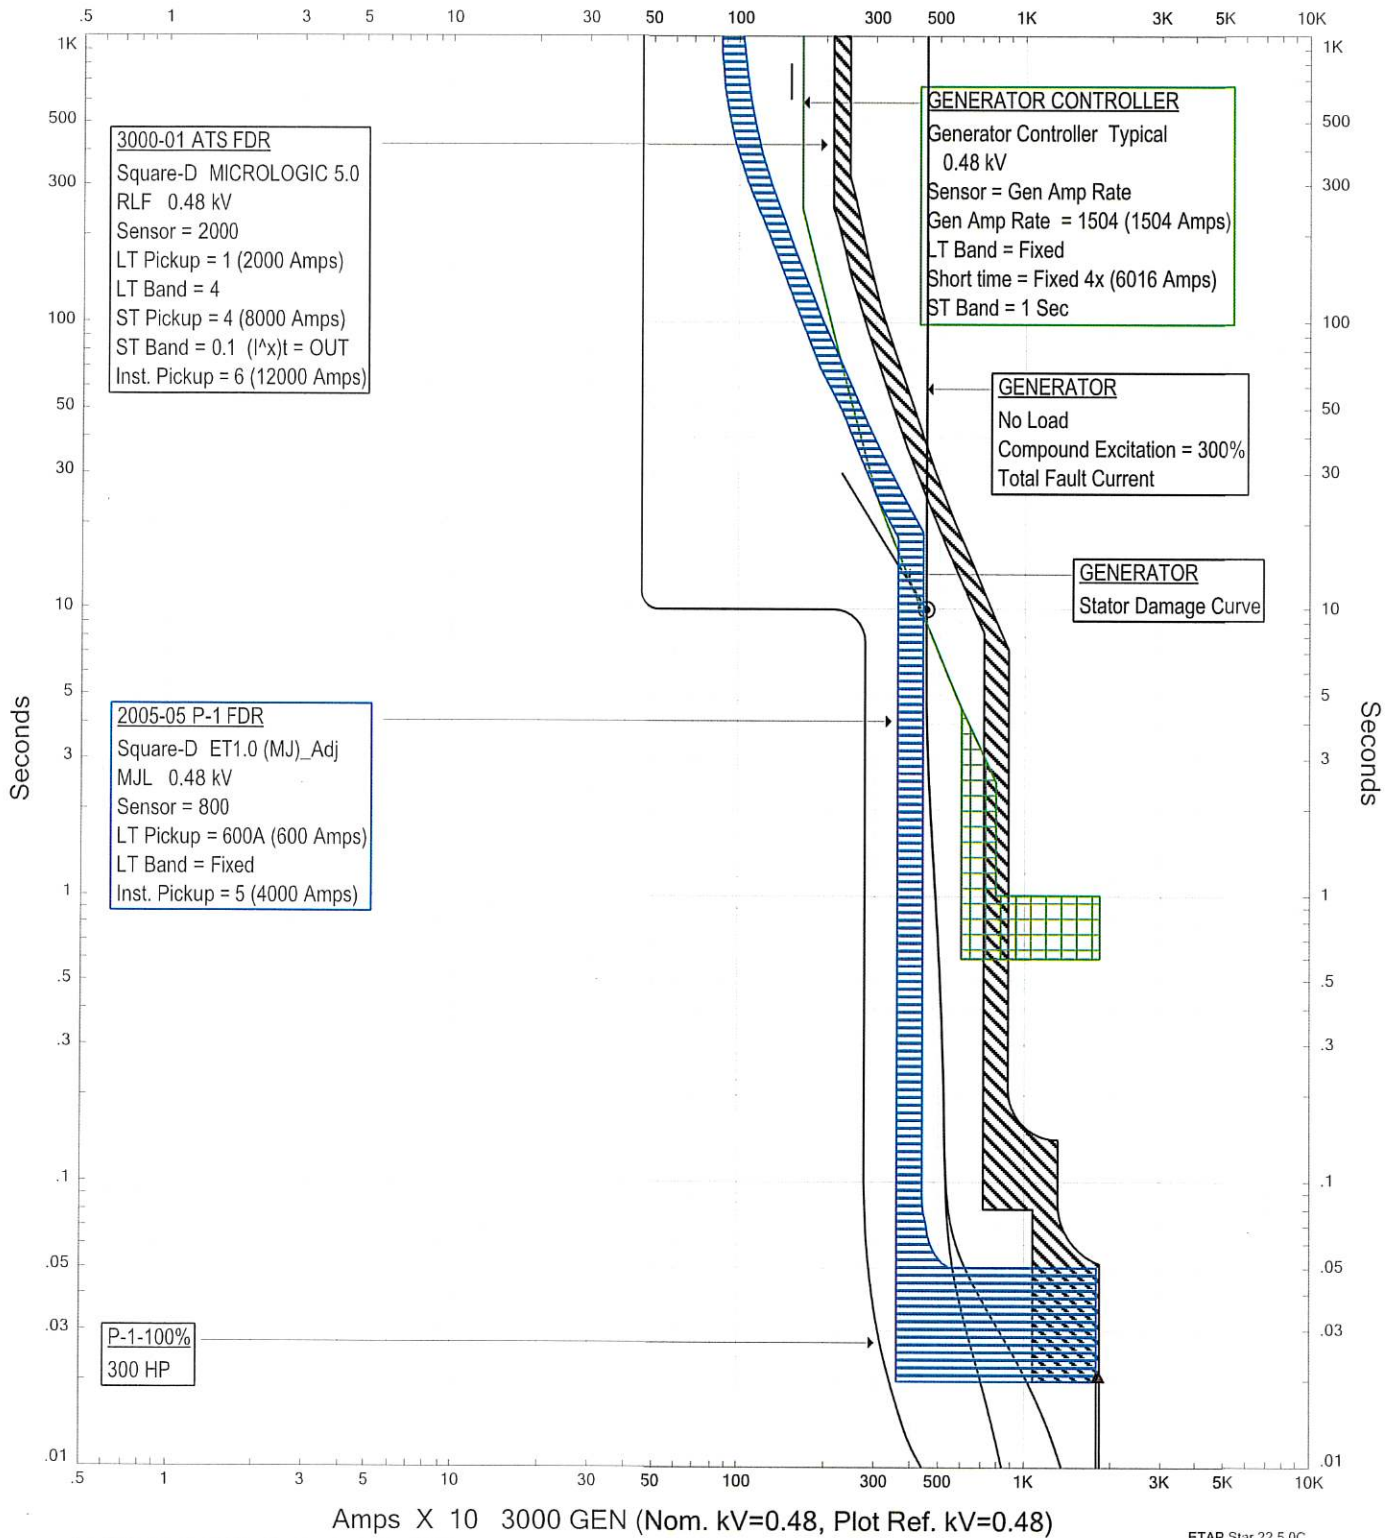

ETAP Star 22.5.0C


ETCC 2055

Schneider
Electric

Project: Montz Pump Station
 Location: New Orleans, LA
 Contract: 51276520

Rev: Base
 Fault: Phase

Amps X 100 2035 P-1 STARTER (Nom. kV=0.48, Plot Ref. kV=0.48)

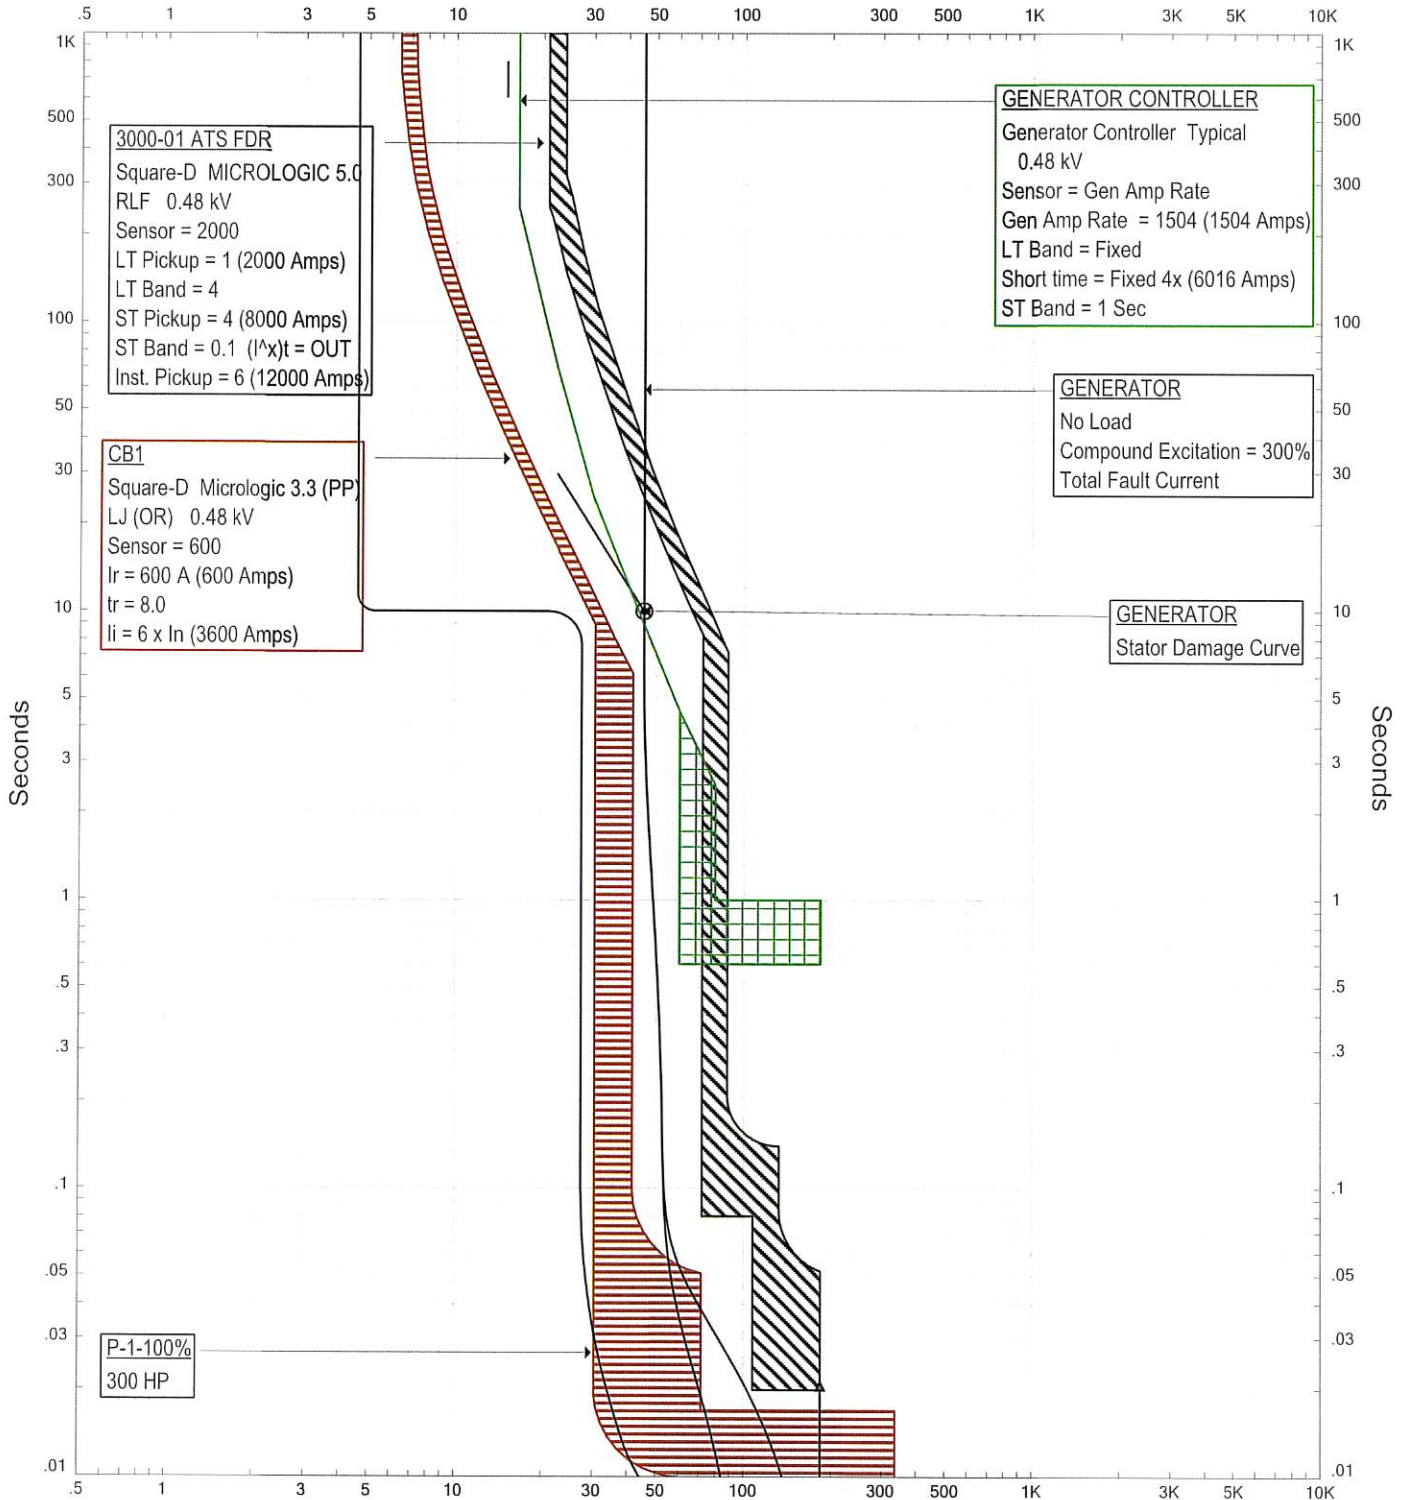

Amps X 100 2035 P-1 STARTER (Nom. kV=0.48, Plot Ref. kV=0.48)

ETAP Star 22.5.0C

Star1

Schneider
 Electric

Project: Montz Pump Station
 Location: New Orleans, LA
 Contract: 51276520

Rev: Base
 Fault: Phase